



FIXED CALIPER

P4 30/34 A 20 . 4756 . 62



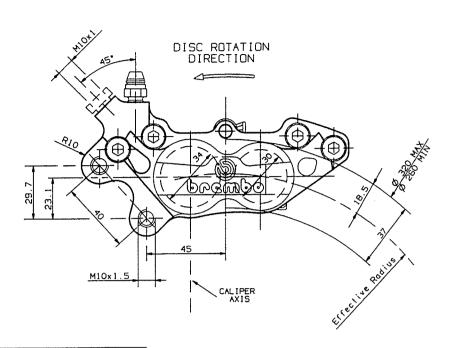

DESCRIPTION

Fixed caliper with 4 apposed pistons. realized by semicolipers joined by bolts.


Pads are supported by two pins.

Construction Material: Aluminium Alloy Hard Oxidation.

Operating fluid: brake fluid DOT4.

N.B.: drawing shows left side caliper.
Code 20.4756.52
Mounting side behind the fork.

PADS SHAPE AND DIMENSIONS



TECHNICAL CHARACTERISTICS

Pistons number and diameter: 4 30/34 mm

MAX working pressure: A) Disc position (TOLERANCE):

40bar ±0.7 mm

Average pod surface (without cut): (with cut):

23 cm² 20 cm²

Weight (with sintered pads):

0.780 Kg

CONFIGURATION

CODE CHURACT	PADS FRICTION MATERIAL	BODY COLOR	MOUNT. SIDE	USABLE DISCS THICKNESS
20.4756.52	BREMBO JO1	GOLD	SX DX	5.0 mm

AVAILABLE SPARE PARTS

CODE PARTS	PADS WITH CUT	PADS WITH CUT	BLEEDER SCREW	800TS	PIN	RETAINER
 20.4756. ₆₂	107.4426.50	107.6930.30 (Z01)	105.2812.13	105.1502.10	120.3840.81	105.4542.21

Indicating informations subject to modification. For further specifications contact Technical Section.

LAST UPDATE: 19/10/1992